

High-Performance Treatments & Coatings



Advanced Technologies

a MISUMI Group Company

Leading-edge Surface Treatments/Coatings Increase Wear, Improve Product Performance

Surface Treatments:



DayKool™ (XCR)—a cryogenic steel conditioning process used in addition to heat treating. An effective way to achieve optimum toughness, improved strength, and dimensional stability. Used primarily with hard, thick materials.



DayTride® (XN)—a low temperature, cost-effective surface application that treats all exposed surfaces. Provides increased dimensional stability. Ideal for punches and die buttons. Approx. hardness: RC73.



Versa/plus™—a thin film coating provides superior hardness (harder than carbide). Super-smooth finish on the point helps reduce galling and maintenance. Ideal for higher-than-normal punching frequency.

Abrasive Wear:



DayTiN® (XNT)—PVD coating provides excellent wear resistance and lubricity. Not recommended for stainless steel, copper, or nickel. A good general-purpose coating. Approx. hardness: *Vickers 2300.



TiCN (XCN)—ultra-hard (harder than carbide), thin PVD coating. Provides superior abrasive wear resistance and lubricity. Well-suited for stainless steel, nickel, and copper. Approx. hardness: *Vickers 3000.



DayTAN™ (XAN)—ultra-hard (harder than carbide), high-aluminum PVD coating. Provides high temperature resistance. Well-suited for applications where surface heat is generated. Ideal for HSLA, dual phase, and TRIP steels. Approx. hardness: *Vickers 3400.



ZertonPlus™ (XNA)—PVD coating with superior hardness (harder than carbide); provides superior abrasive wear resistance and excellent lubricity. Provides highest temperature resistance, thermal shock stability, & hot hardness. Approx. hardness: *Vickers 3200.

Adhesive Wear:




XNM—a solid PVD lubricant coating. Provides both lubricity and wear resistance not available from other PVD or CVD processes. Ideal for aluminum, pre-painted, and galvanized steels. Approx. hardness: *Vickers 2000.



XCD—diamond-like carbon coating. Combines high hardness with an extremely low coefficient of friction. Good protection against abrasive and adhesive wear. Ideal for aluminum. Approx. hardness: *Vickers 2500.

Extrusion Coatings:



XNP—the ultimate coating for improved resistance to galling; excellent wear resistance, superior surface finish, and high lubricity. Ideal for extruding and forming applications. Tolerance is ± 0.002 ". Approx. hardness: *Vickers 3100.



XNAPProgress (XNAP)—ultra-hard PVD coating that absorbs shear stress; provides excellent high-temperature resistance. Ideal for stamping where tools are exposed to extreme stress profiles. A good alternative to TD coating without the dimensional changes associated with that process. Approx. hardness: *Vickers 3200.

Miscellaneous Coating:



CRN—excellent adhesion, high toughness, and good corrosion resistance. Primary applications are metal forming (copper, brass, & bronze), metal die casting, and plastic injection molding. Approx. hardness: *Vickers 1800-2100.

Code / Delivery			
XCR —DayKool™	+ 1 day	XNM	+ 12 days
XN —DayTride®	+ 3 days	XCD	+ 12 days
XNT —DayTiN®	+ 3 days	XNP	+ 8 days
XCN —TiCN	+ 3 days	XNAP —	+ 12 days
XAN —DayTAN™	+ 4 days	XNAPProgress	
XNA —ZertonPlus™	+ 7 days	CRN	+ 7 days

* Vickers used when RC exceeds 80. © DayTride and DayTiN are registered trademarks of Dayton Progress. ™ DayTAN, DayKool, and ZertonPlus are trademarks of Dayton Progress.

Tool steels (panel #2) that are acceptable to be coated are M2, PS, and PS4. These can be coated without lowering the hardness (Rockwell).



A2 & D2 material are not available for coated products: These materials are subject to a softer hardness (Rockwell), hardness variations, size control problems, and bad adhesion.

Select the Coating that Matches Your Specific Needs

Regardless of the end product(s) your company manufactures, you can improve the length of run time, reduce changeover time, improve uptime, and get more for your stamping dollar by selecting the type of coating that matches your individual operational capabilities.

The chart on the right describes the causes, effects, and solutions for abrasive wear and adhesive wear. The slider graph following shows the relative suitability for each type of treatment/coating in both of those categories. The bubble chart shows the relationship between service temperature, coefficient of friction, and hardness of the coating.

	Abrasive Wear	Adhesive Wear
Common Names	Abrasion, pitting, cavitation, striation, etc.	Galling, pick-up, sticking, welding, etc.
Processes	Hard sheet material—jagged edges Piercing, shearing, etc. Perpendicular to direction of forming Process temperature may be too high or low Clearances may be too tight	Soft sheet material Drawing, extruding, etc. Sliding wear—along direction of forming Process temperature may be too high Clearances may be tight
Solutions	Increase surface hardness Increase clearances Choose high thermal resistance coating	Increase lubrication Choose lower coefficient coating Choose high thermal resistance coating Increase clearances

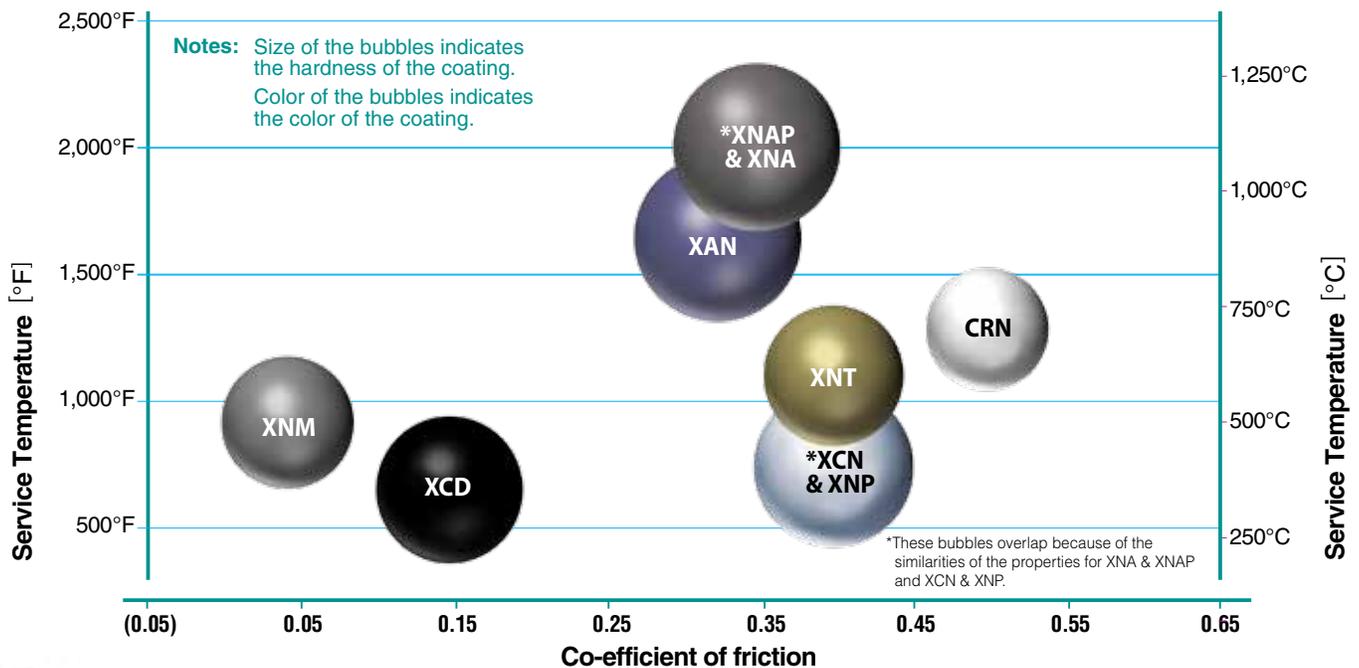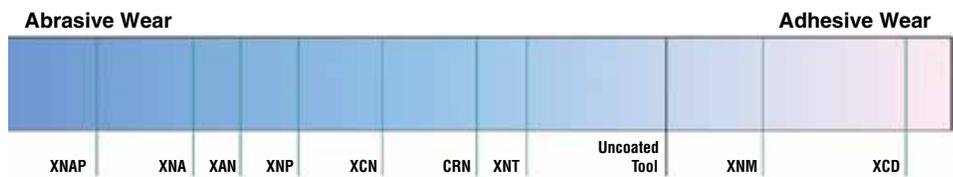

*High Strength Steels (HSS)

*Special tool steels are available on request.

Dayton coated punches are heat treated, precision ground, and made with high performance steel, including, but not limited to, the following:

- **M2**—triple tempered HSS for longer runs. Performs well at higher temperatures; ideal for high-speed applications.
- **PS**—triple tempered with high vanadium and carbon particles. Higher wear and impact performance.
- **PS4**—with 4% vanadium it provides higher wear resistance and improved toughness.

Dayton Delivers Full In-house Services and World-class Technical Support

Proprietary Coatings

Dayton is the industry's leader with the largest selection of state-of-the-art coatings—many of them tested in our lab.

In general, surface treatments enhance wear resistance and reduce surface friction above and beyond the capabilities of the substrate material (tool steel). However, surface treatments can be applied to a wide variety of tool steels with varying results.

Dayton's expertise in developing coatings to meet a specific requirement is second to none. We are constantly updating and improving these coatings to meet the ever-changing needs of our customers.

Heat Treatment

Punch performance depends on the design of the punch, the tool steel used, the finishing process, and other factors. Equally as important, the total performance is directly related to the quality of the heat treatment, i.e., hardening, cryogenics, or tempering.

In order to acquire optimum results for a given application, specific heat treatment guidelines must be followed. Careful monitoring of this process is essential to ensure the toughness of the tool steel—a prerequisite for high-quality stamping tools.

No company pays more attention to heat treating than Dayton Progress. Our in-plant facilities are constantly updated; product performance is regularly monitored; and our Chief Metallurgist oversees all heat treating processes.



Metallurgy Lab

Dayton's in-house metallurgy lab is designed to develop new products and to test and analyze the quality and viability of materials used in the manufacture of Dayton products. Our metallurgy lab comes fully equipped with top-quality testing and analytical equipment, and boasts best-in-class metallurgy and quality assurance.

Laboratory services include: hardness testing; metallography (e.g., coating thickness); and failure analysis. Routine testing (metallurgical, mechanical, and chemical) is performed on raw materials, semi-processed, and finished parts to determine compliance with quality requirements and design/manufacturing specifications.

Professional Technical Assistance

Dayton technical experts deliver a wide range of technical assistance and support—on the web, over the phone, or in person.

Services include component design assistance; manufacturing advice (e.g., precision finishing, such as polishing and lapping); heat treatment protocols (e.g., high-volume coating production); product applications and usage; and metallurgical expertise.



High-resolution scanning electron microscopes (above) and other devices are used to evaluate metal structures—often to determine the cause and prevention of product failure.



For additional information or help in selecting the right coating for your operation, contact your nearest Dayton representative.



Advanced Technologies

Designed with your needs in mind



**The industry's
largest selection
of standard
and custom
surface
treatments
and coatings**

Special Surface Treatments & Coatings

Dayton's leading-edge coatings and other unique surface treatments have been developed to improve in-plant performance by increasing tool hardness and wear resistance, thus reducing punching friction and torque, inhibiting galling and chip welding, and/or improving lubrication.

The standard surface treatments and coatings shown in this brochure were developed with a specific hardness rating based on the optimum usage of the punch. The hardness and type of coating you need depends on the steel selection, the application, the duration of the die run, and other factors.

In addition to our standard treatments and coatings, Dayton provides custom coatings/treatments based on your special needs and applications. For example, some steels can be coated to increase wear. Others can be coated for toughness, plus a single-layer coating can be applied that provides greater wear than a multi-layer coating.

For help in selecting the right surface treatment or coating for your operation, contact your nearest Dayton representative today.

Dayton Versa/plus™ punches feature a thin film coating for superior, harder-than-carbide hardness; a super-smooth finish on the point, resulting in less galling and reduced maintenance; and more. Select Dayton Versa/plus™ for optimum punch performance.



Dayton Progress Corporation
500 Progress Road
P.O. Box 39
Dayton, OH 45449-0039 USA

Dayton Progress Detroit
34488 Doreka Dr.
Fraser, MI 48026

Dayton Progress Portland
1314 Meridian St.
Portland, IN 47371 USA

Dayton Progress Canada, Ltd.
861 Rowntree Dairy Road
Woodbridge, Ontario L4L 5W3

Dayton Progress Mexico, S. de R.L. de C.V.
Access II Number 5, Warehouse 9
Benito Juarez Industrial Park
Querétaro, Qro. Mexico 76130

Dayton Progress, Ltd.
G1 Holly Farm Business Park
Honiley, Kenilworth
Warwickshire CV8 1NP UK

Dayton Progress Corporation of Japan
2-7-35 Hashimotodai, Midori-Ku
Sagamihara-Shi, Kanagawa-Ken
252-0132 Japan

Dayton Progress GmbH
Adenauerallee 2
61440 Oberursel/TS, Germany

Dayton Progress Perfuradores Lda
Zona Industrial de Casal da Areia Lote 17
Cós, 2460-392 Alcobaça, Portugal

Dayton Progress SAS
105 Avenue de l'Épinette
BP 128
Zone Industrielle
77107 Meaux Cedex, France

Dayton Progress Czech sro
Hala G
Pražská 707
CZ-294 71 Benátky nad Jizerou
Czech Republic



Advanced Technologies